BOSTONtec
Ergonomic Workstations

How to Store Memory Positions

Workstation Part Prefix

PBM
PBMC
PBH
PBHC
PHF
LPC

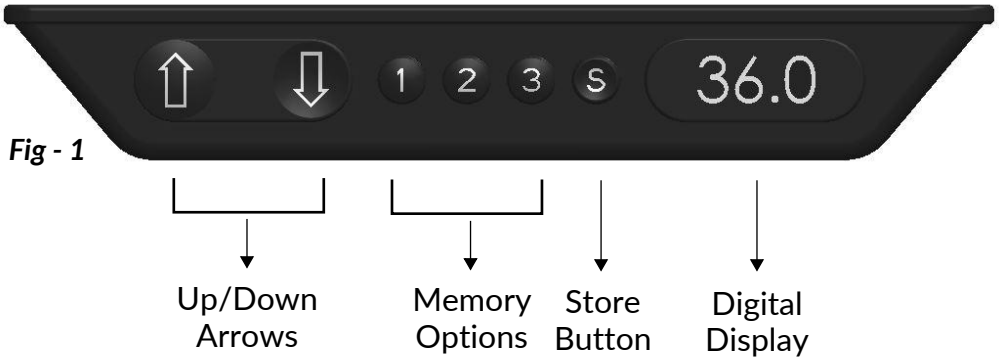

Fig - 1

Adjusting Initial Height:

Programmable height switch displays 24.5" height by default and resetting will be required to match actual height of work surface

1. Measure height from floor to top of work surface
2. Press the up and down arrows at the same time and hold for 5 seconds
3. When the display shows three minuses (---), adjust digital display using the up or down arrows to measured height
4. After 5 seconds of inactivity, there will be a short blink and system is set

To Set Height:

1. Using the up and down arrows, raise or lower workstation to desired height
2. Once in position, push the store button and release
3. Press and hold the desired memory option for three seconds then release

To Use Programmed Height:

1. Press and hold desired preset memory button until the workstation stops moving